


# SOLYX® Glass Finishes

## SXJ-0585 Dual Motion Gradient

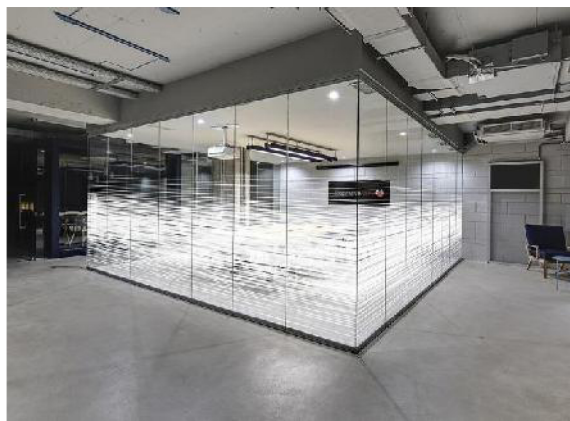

### Product Details

**SOLYX® SXJ-0585 Dual Motion Gradient** is a frosted polyester film with a translucent, gradually fading gradient background effect. The gradient fades from the center up and down. Ideal for direct visibility control. This film is designed for application to interior glass, single or double pane and exterior facing glass. Made of durable Polyester with a matte printed design, perfect for privacy, decorative or architectural applications. The total nominal thickness is 4mil (100 micron). Manufactured with a silicone liner, which protects the clear, pressure-sensitive adhesive, and applied using the same tools and techniques for window films.

### Flammability Rating:

When applied to surfaces- glass or plastic sheet:

Horizontal Burn (Flame Spread) ASTM D-635 inch Less than 1.0

UL 94 Rating UL 94 UL Classification V-O

Class A 0 -25 Flame Spread Index 0 -450 Smoke Developed Index

SOLYX Films are suitable for installation onto fire rated glass and will not affect the rating of fire rated glass.

### Installation and Warranty

#### Installation

Installation should be in accordance with manufacturer's installation instructions.

#### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

### Product Distribution and Contact Information

#### Distribution

SOLYX® Decorative Films are available through qualified Installing Dealers, Distributors or from Decorative Films, LLC.

Samples submitted upon request.

#### Contact Information

Decorative Films, LLC

1-888-657-5224

www.decorativefilm.com

### Product Description

**SOLYX® SXJ-0585 Dual Motion Gradient** A simple dual fading gradient of blurred lines from white to clear from the center up and down. Excellent for semi-privacy while still allowing excellent light transmission.

### Specifications

Product Code	SXJ-0585
Product Family	Gradients
Film Type	SOLYX iQ Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior or Exterior
Available Height	60" (or custom)
Full Roll Length	95 linear feet
Thickness	4mil
Shading Coefficient	0.55
Visible Light Reflection	27%
Visible Light Transmission	75%
UV Transmission	2%
Total Solar energy Rejected	38%

Solar Energy Absorbed	25%
Infra-Red Transmission	70%

### Product Construction

#### Face Film

4 mil SOLYX iQ polyester

#### Adhesive

Clear, Pressure-sensitive

#### Release Liner

Silicone