


SOLYX® Glass Finishes

SXJ-0590 Point Gradient

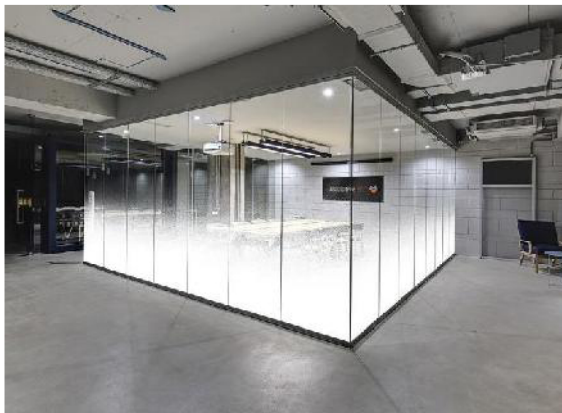

Product Details

SOLYX: SXJ-0590 Point Gradient is a polyester film with a white translucent gradient effect. The random dots become smaller from the bottom up providing direct visibility control. This film is designed for application to interior glass, single or double pane and exterior facing glass. Made of durable Polyester with a white matte random dot design, perfect for privacy, decorative or architectural applications. Manufactured with a silicone liner, which protects the clear, pressure-sensitive adhesive, and applied using the same tools and techniques for window films.

Flammability Rating:

When applied to surfaces- glass or plastic sheet:
 Horizontal Burn (Flame Spread) ASTM D-635 inch Less than 1.0
 UL 94 Rating UL 94 UL Classification V-O
 Class A 0 -25 Flame Spread Index 0 -450 Smoke Developed Index
 SOLYX Films are suitable for installation onto fire rated glass and will not affect the rating of fire rated glass.

Installation and Warranty

Installation

Installation should be in accordance with manufacturer's installation instructions.

Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details

Product Distribution and Contact Information

Distribution

SOLYX® Decorative Films are available through qualified Installing Dealers, Distributors or from Decorative Films, LLC.

Samples submitted upon request.

Contact Information

Decorative Films, LLC
 1-888-657-5224
www.decorativefilm.com

Product Description

SOLYX: SXJ-0590 Point Gradient is a polyester film with white translucent random dots that become smaller towards the top of the film in a gradient effect. The pattern fades from the bottom up providing direct visibility control.

Specifications

Product Code	SXJ-0590
Product Family	Gradient Window Films
Film Type	Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior
Available Height	60" (or custom)
Full Roll Length	100 linear feet
Thickness	2 mil
Shading Coefficient	0.55
Visible Light Reflection	27%
Visible Light Transmission	75%
UV Transmission	2%
Total Solar energy Rejected	38%
Solar Energy Absorbed	25%
Infra-Red Transmission	70%

Product Construction

Face Film

2 mil SOLYX clear polyester

Adhesive

Clear, Pressure-sensitive

Release Liner

Silicone